

CLIC対応管種別外径一覧

型式	適合管 外径寸法 mm	水道用 架橋 ポリエチレン管		ポリブデン管		被覆 架橋 ポリエチレン管				電気用 PF管		ガス用 CD管		マシン フレキ		サヤ フレキ		
		外径	呼び径	外径	呼び径	被覆5mm	呼び径	被覆10mm	呼び径	外径	呼び径	外径	呼び径	外径	呼び径	外径	呼び径	
小口径	CLIC-8	7.8 ~ 9.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-10	9.5 ~ 11.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-12	11.8 ~ 14.3	13.0	10A	13.0	10A	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-15	14.3 ~ 16.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-17	16.8 ~ 19.5	17.0	13A	17.0	13A	-	-	-	-	-	-	-	17.7	12A	-	-	
	CLIC-20	19.5 ~ 21.8	21.5	16A	21.5	16A	-	-	-	-	21.5	14	21.0	16A	21.5	14A	21.0	16A
	CLIC-22	21.8 ~ 24.8	-	-	-	-	-	-	-	-	23.0	16	-	-	23.0	16A	23.0	18A
	CLIC-25	24.8 ~ 27.8	27.0	20A	27.0	20A	24.0	10A	-	-	-	-	-	-	-	-	-	-
	CLIC-28	27.8 ~ 31.2	-	-	-	-	28.0	13A	-	-	30.5	22	28.0 30.5	22A 25A	30.5	22A	28.0 30.5	22A
	CLIC-32	31.2 ~ 35.5	34.0	-	-	-	32.5	16A	34.0	10A	-	-	34.0	28A	-	-	34.0	28A
	CLIC-36	35.5 ~ 39.5	-	-	-	-	38.0	20A	38.0	13A	36.5	28	36.5	30A	36.5	28A	36.5	30A
	CLIC-40	39.5 ~ 43.5	42.0	-	-	-	-	-	42.5	16A	-	-	42.0	36A	-	-	42.0	36A
	CLIC-47	46.5 ~ 50.5	48.0	-	-	-	-	-	48.0	20A	45.6	36	47.0	42A	45.5	36A	-	-
	CLIC-51	50.5 ~ 55.5	-	-	-	-	-	-	-	-	52	42	-	-	52.0	42A	-	-
CLIC-59	58.5 ~ 64.0	60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
大口径	CLIC-63	63.0 ~ 71.0	-	-	-	-	-	-	-	64.5	54	-	-	64.5	54A	-	-	
	CLIC-71	71.0 ~ 80.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-80	80.0 ~ 90.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-90	90.0 ~ 101.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-101	101.0 ~ 113.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	CLIC-113	113.0 ~ 127.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

上記適合管サイズは基準寸法を示します。
 使用メーカーにより外径寸法が多少異なる事がありますので、使用材の外径寸法をご確認下さい。



サイズ別製品寸法表及び最小梱包数

型式	適合管 外径寸法 mm	Amm	Bmm	Cmm	Dmm	Emm	Fmm	取付穴径 φmm	適正荷重 Kg	最小梱包数/個		
										CLIC-標準・ppm・top (注1)	CLIC-eco	
小口径	CLIC-8	7.8 ~ 9.5	17.1	17.5	26.4	17.1	14.5	7.5	3.5	10	100	-
	CLIC-10	9.5 ~ 11.8	17.1	16.6	26.2	17.1	14.5	7.5	3.5	10	100	200
	CLIC-12	11.8 ~ 14.3	20.2	19.4	28.2	17.2	14.5	7.6	4.5	15	100	200
	CLIC-15	14.3 ~ 16.8	20.6	20.0	32.0	17.1	14.5	7.5	4.5	15	100	200
	CLIC-17	16.8 ~ 19.5	22.5	22.0	35.4	19.5	16.0	7.8	4.5	20	100	200
	CLIC-20	19.5 ~ 21.8	24.8	23.7	39.4	20.0	16.3	7.8	4.5	20	100	200
	CLIC-22	21.8 ~ 24.8	27.8	25.5	42.0	20.0	16.5	7.8	4.5	25	50	200
	CLIC-25	24.8 ~ 27.8	30.4	26.8	45.1	20.0	17.0	8.8	4.5	25	50	100
	CLIC-28	27.8 ~ 31.2	33.4	28.8	48.9	20.2	17.0	8.8	4.5	30	50	100
	CLIC-32	31.2 ~ 35.5	38.0	32.2	54.4	21.0	17.5	9.0	4.5	30	50	100
	CLIC-36	35.5 ~ 39.5	41.8	34.3	59.4	21.0	18.0	9.1	4.5	35	25	100
	CLIC-40	39.5 ~ 43.5	46.2	36.3	64.2	21.0	18.6	9.4	4.5	35	25	50
	CLIC-47	46.5 ~ 50.5	53.5	40.6	72.8	22.0	19.5	9.8	4.5	40	25	-
	CLIC-51	50.5 ~ 55.5	58.6	44.3	78.7	23.0	20.0	10.2	4.5	40	25	-
CLIC-59	58.5 ~ 64.0	66.3	48.6	88.2	23.2	21.0	10.7	4.5	50	20	-	
* CLIC-15J	14.3 ~ 16.8	20.6	18.5	30.0	17.4	14.5	7.5	4.5	15	100	-	
大口径	CLIC-63	63.0 ~ 71.0	78.0	72.0	115.0	40.0	31.0	52.0	11.0	60	25	-
	CLIC-71	71.0 ~ 80.0	87.0	77.0	124.0	40.0	31.0	58.0	11.0	70	25	-
	CLIC-80	80.0 ~ 90.0	98.0	83.0	136.0	40.0	31.0	66.0	11.0	80	25	-
	CLIC-90	90.0 ~ 101.0	110.0	89.0	148.0	40.0	31.0	76.0	11.0	90	25	-
	CLIC-101	101.0 ~ 113.0	124.0	96.0	163.0	40.0	31.0	86.0	11.0	100	25	-
	CLIC-113	113.0 ~ 127.0	139.0	105.0	180.0	40.0	31.0	102.0	11.0	110	25	-

*CLIC-15Jは都市機構認定品 *適正荷重は実測値を元に、安全率を約3として表示しています。 注1 CLIC-標準 (CLIC-8~CLIC-59) CLIC-ppm (CLIC-63~CLIC-113)

型式	VP管 エンビ管		水道用 亜鉛メッキ 鋼管			一般配管用 ステンレス 鋼管		配管用 炭素鋼 鋼管			建築配管用 銅管			東京ガス 標準ガス パイプ		厚鋼電線管		薄鋼電線管		ねじなし電線管		アルミニウム電線管	
	外径	呼び径	外径	呼び方A	呼び方B	外径	呼び方	外径	呼び方A	呼び方B	外径	呼び方A	呼び方B	外径	呼び径	外径	呼び方	外径	呼び方	外径	呼び方	外径	呼び方
clic-8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
clic-10	-	-	-	-	-	9.52	Su8	10.5	6	1/8	9.52	8	1/4	-	-	-	-	-	-	-	-	-	-
clic-12	-	-	-	-	-	12.70	Su10	13.8	8	1/4	12.70	10	3/8	13.5	8A	-	-	-	-	-	-	-	-
clic-15	15.0	10A	-	-	-	15.88	Su13	-	-	-	15.88	15	1/2	15.7	10A	-	-	15.9	15	15.9	E15	-	-
clic-17	18.0	13A	17.3	10	3/8	-	-	17.3	10	3/8	19.05	-	5/8	-	-	-	-	19.1	19	19.1	E19	19.1	19
clic-20	-	-	21.7	15	1/2	-	-	21.7	15	1/2	-	-	-	19.9	15A	21	16	-	-	-	-	-	-
clic-22	22.0	16A	-	-	-	22.22	Su20	-	-	-	22.22	20	3/4	-	-	-	-	-	-	-	-	-	-
clic-25	26.0	20A	27.2	20	3/8	-	-	27.2	20	3/8	-	-	-	25.7	20A	26.5	22	25.4	25	25.4	E25	25.4	25
clic-28	-	-	-	-	-	28.58	Su25	-	-	-	28.58	25	1	-	-	-	-	-	-	-	-	-	-
clic-32	32.0	25A	34.0	25	1	34.00	Su32	34.0	25	1	34.92	32	1 1/4	32.3	25A	33.3	28	31.8	31	31.8	E31	31.8	31
clic-36	38.0	32A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	38.1	39	38.1	E39	38.1	39
clic-40	-	-	42.7	32	1-1/4	42.70	Su40	42.7	32	1-1/4	41.28	40	1 1/2	-	-	41.9	36	-	-	-	-	-	-
clic-47	48.0	40A	48.6	40	1-1/2	48.60	Su50	48.6	40	1-1/2	-	-	-	-	-	47.8	42	-	-	-	-	-	-
clic-51	-	-	-	-	-	-	-	-	-	-	53.98	50	2	-	-	-	-	50.8	51	50.8	E51	50.8	51
clic-59	60.0	50A	60.5	50	2	60.50	Su60	60.5	50	2	-	-	-	-	-	59.6	54	-	-	-	-	-	-
clic-63	-	-	-	-	-	-	-	-	-	-	66.68	65	2 1/2	-	-	-	-	63.5	63	63.5	E63	63.5	63
clic-71	76.0	65A	76.3	65	2-1/2	76.30	Su75	76.3	65	2-1/2	79.38	80	3	-	-	75.2	70	76.2	75	76.2	E75	76.2	75
clic-80	89.0	80A	89.1	80	3	89.10	Su80	89.1	80	3	-	-	-	-	-	87.9	82	-	-	-	-	-	-
clic-90	-	-	-	-	-	-	-	-	-	-	92.08	90	-	-	-	100.7	92	-	-	-	-	-	-
clic-101	-	-	101.6	90	3-1/2	-	-	101.6	90	3-1/2	104.78	100	4	-	-	-	-	-	-	-	-	-	-
clic-113	114.0	100A	114.3	100	4	114.30	Su100	114.3	100	4	-	-	-	-	-	113.4	104	-	-	-	-	-	-

※建築配管用銅管サイズは、タイプLを記載しております。

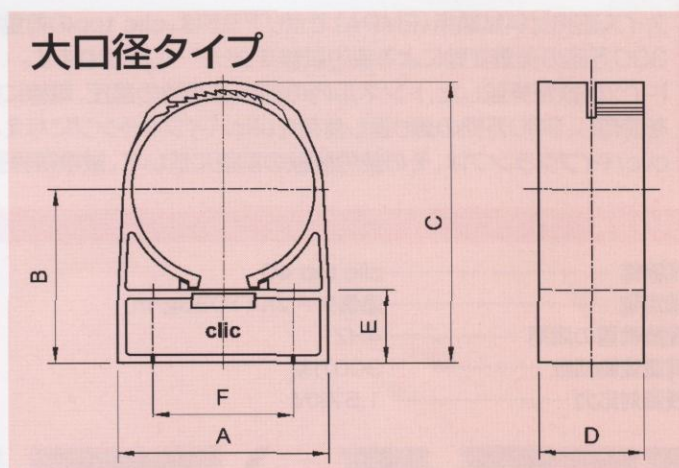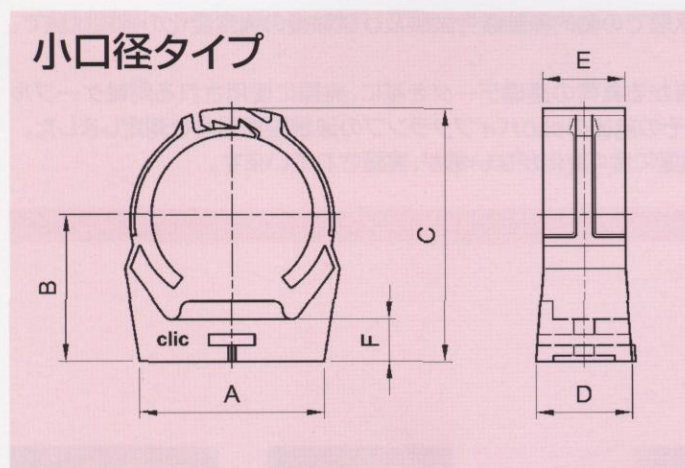

適正荷重方向

